


MODEL A58HE - ETHERNET ABSOLUTE ENCODER

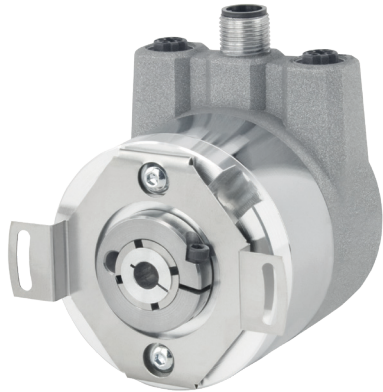

Ø58 mm

EtherCAT®

EtherNet/IP®

PROFINET®

FEATURES

- Single turn/multi-turn absolute encoder (16 Bit ST / 43 Bit MT)
- Available in three industrial ethernet protocols:
 - EtherCAT® with CoE, FoE, EoE – device profile: CiA DS-406 V4.0.2, Class 3
 - EtherNet/IP™ position sensor, DLR
 - PROFINET® I-O (CC-C) – device profile: switchable V4.1, Class 3, 4
- Maintenance-free and environmentally friendly magnetic design
- Energy harvesting magnetic multi-turn technology
- No gears or batteries
- Low TCO and easy provisioning with internal web server
- Color LEDs for operating condition, bus status, link activity
- Compact design with bus cover
- 58 mm (2.28") diameter package

The Model A58HE is an EtherCAT®, EtherNet/IP™, or PROFINET® protocol, multi-turn absolute encoder designed for heavy duty industrial applications. It is particularly suited to applications where Ethernet-based connectivity is required, and the encoder must retain position information after power-off events. Easily designed into a wide variety of system applications, the A58HE plugs directly into your network with minimal provisioning for rapid deployment, facilitating data exchange among myriad networked devices. The Model A58HE retains absolute position information even after a power loss, facilitating speedy system recovery at start-up without the need for system re-homing.


Ready for Industry 4.0 and for the Industrial Internet of Things (IIoT), data exchange between the Model A58HE and other applications has no influence on the control loop. The Model A58HE is non-reactive and can work independently from the PLC or master, transferring data through network gateways to other automation networks and sites, and up to the cloud for analysis.

COMMON APPLICATIONS

Robotics, Telescopes, Antennas, Medical Scanners, Wind Turbines, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

MODEL A58HE ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

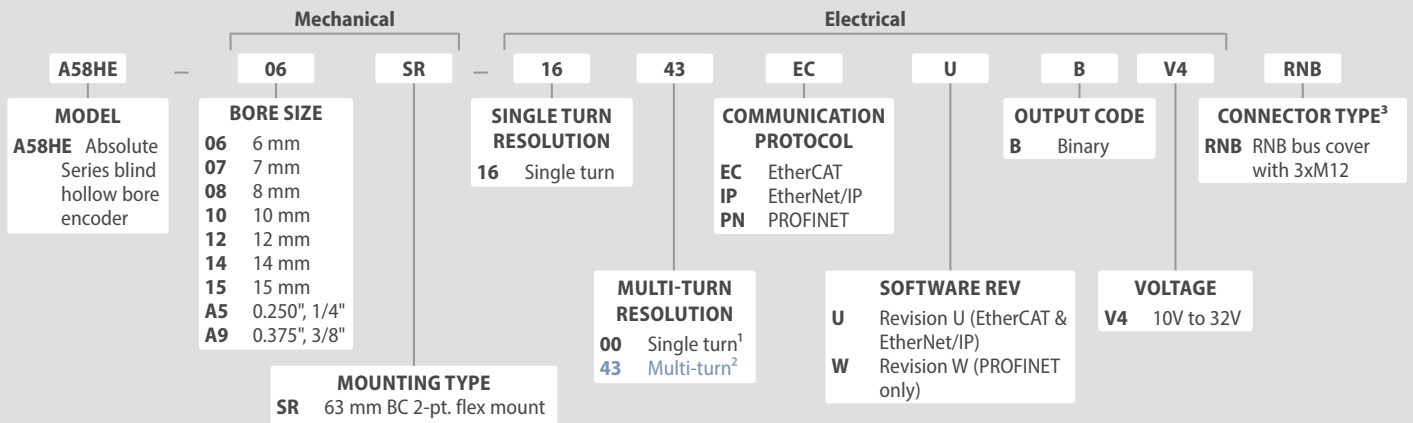

NOTES:

- Single turn encoders cannot be configured for multi-turn resolution.
- Customer configures actual resolution at setup.
- For mating connectors, cables, and cordsets see encoder.com/encoder-accessories

EtherCAT® (Ethernet for Control and Automation Technology) is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
 EtherNet/IP™ is a trademark of ODVA, Inc.
 PROFINET® is a registered trademark and patented technology, licensed by PU (PROFIBUS & PROFINET) International.


MODEL A58HE - ETHERNET ABSOLUTE ENCODER

MODEL A58HE SPECIFICATIONS			
Electrical		Data Transfer.....100BASE-TX	Connection Cover.....Die cast aluminum, powder coated
Power Supply.....10 VDC up to 32 VDC		Cycle time.....EtherCAT: up to 50 μ s	Weight.....14.462 oz / 410 g approx
Current Consumption.....typ. 125 mA		EtherNet/IP: 1 ms	Max Radial Shaft Load.....80 N (17.9 lb)
Power Consumption.....typ. 3 W		PROFINET: 250 μ s, applicable for up to 125 μ s	Max Axial Shaft Load.....50 N (11.2 lb)
Sensor Specification		Code.....Binary, CW default, programmable	Starting Torque.....Approximately 1.6 Ncm (2.226 oz-in) at ambient temperature.
Internal Cycle Time.....50 μ s		Programmable Parameters.....Steps per revolution; counts of revolution; preset; scale; counting direction	Max Shaft Speed.....6000 RPM
Resolution		EtherCAT: 2x 8 cam switches; DC-Mode	Bearings
Single Turn.....Up to 65,536 steps/360° (16 bit)		EtherNet/IP: CAMs, warning messages	Bearings Type.....2 precision ball bearings
Multi-Turn.....43 bit		PROFINET: MRPD; MRP; LLD; IRT	Nominal Service Life.....1 x 10 ⁹ revs. at 100% rated shaft load
Accuracy		See associated protocol Technical Reference Manual for full list of programmable attributes for that protocol.	1 x 10 ¹⁰ revs. at 40% rated shaft load
Single Turn..... \pm 0.0878° (\leq 12 bit)		Diagnostic LED.....Traffic and connection management: L/A1: Port 1 (IN) L/A2: Port 2 (OUT)	1 x 10 ¹¹ revs. at 20% rated shaft load
Single Turn, Repeat Accuracy..... \pm 0.0878° (\leq 12 bit)		Status LED.....STAT, MOD: status of encoder and bus	Environmental
Technology		Mechanical	Operating Temp.....-40° to 85° C
Single Turn.....Innovative Hall-sensor technology		Flange.....Blind hollow bore	Storage Temp.....-40° to 100° C
Multi-Turn.....Patented energy-harvesting technology, no battery and no gears		Flange Material.....Aluminum	Sealing.....IP65 tested per EN 60529
Turn on time.....< 1.5 s		Shaft Material.....Stainless steel	ESD.....8 kV tested per EN 61000-4-2
Interface		Shaft Length.....17 mm	Burst.....2 kV tested per 61000-4-4
Interface.....Industrial Ethernet		Insertion depth	EMC.....EN 61000-6-2; EN 61000-6-3
Protocol.....EtherCAT, EtherNet/IP, PROFINET-IO (CC-C)		min.....10 mm	Vibration.....200 m/s ² (10 Hz up to 1000 Hz) (20.3 g [10Hz up to 1000 Hz]) tested per EN 60068-2-6
Device Profile.....EtherCAT: CiA DS-406 V4.0.2, Class 3; EtherNet/IP: Conformance per CT-18, Specification Vol 2, Ed 1.29, CIP Specification Vol 1, Ed 3.31; PROFINET: V4.1, Class 3, 4		max.....19 mm	Shock.....5000 m/s ² (6 ms) 509.8 g (6 ms) tested per EN 60068-2-27
		Housing Cap.....Steel case chrome-plated, magnetic shielding	Design.....According to DIN VDE 0160

NETWORK BUS CONNECTOR PINOUT


Bus cover with 3x M12x1. For EPC-supplied mating cables, wiring table is provided with cable. Trim back and insulate unused wires.

Female Connector Port1 (IN)




Function	M12x1, 4-pin, D-coded
Tx+	1
Rx+	2
Tx-	3
Rx-	4

Power



Function	M12x1, 4-pin, A-coded
(+) Vcc	1
n. c.	2
GND	3
n. c.	4

Female Connector Port2 (OUT)





Function	M12x1, 4-pin, D-coded
Tx+	1
Rx+	2
Tx-	3
Rx-	4

EPC RESERVES THE RIGHT TO UPDATE, REVISE AND AMEND ALL SOFTWARE AND TECHNICAL DATA OR CONTENT AT ANY TIME. EPC SHALL HAVE NO LIABILITY OF ANY KIND OR NATURE FOR ANY TECHNICAL ERRORS OR OMISSIONS IN ANY SOFTWARE OR TECHNICAL DATA. See encoder.com for more information.

MODEL A58HE - ETHERNET ABSOLUTE ENCODER

MODEL A58HE 63 MM 2 PT. FLEX MOUNT (SR)

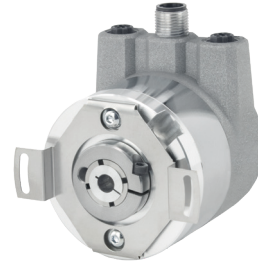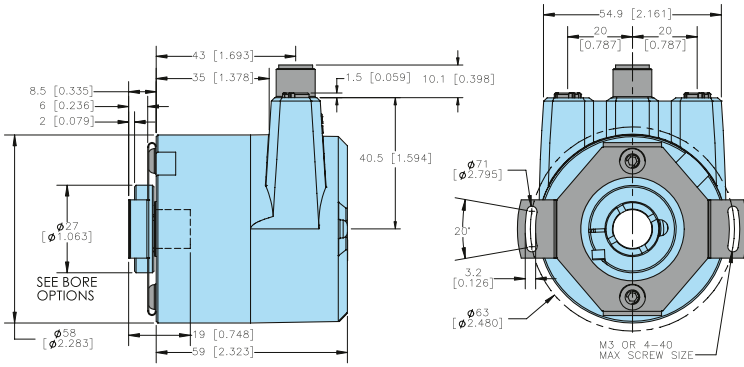

Primary dimensions are in mm, secondary dimensions SI units [inches] in brackets or reference only.