

MODEL 958 – SINGLE TURN ABSOLUTE ENCODER

DISCONTINUED - Contact EPC Technical Support for assistance: sales@encoder.com



Ø58 mm

FEATURES

- European Size 58 (58 mm) Package
- Resolutions up to 12 Bit (4096 PPR equivalent)
- Incorporates Opto-ASIC Technology
- Industrial Grade, Heavy Duty Housing
- Wide Range of Operating Voltages (4.75 to 26 VDC)


The Model 958 Single Turn Absolute Encoder is ideal for a wide variety of industrial applications requiring an encoder with European Size 58 (58 mm) mounting and absolute positioning output. With an industrial grade housing and innovative Opto-ASIC circuitry, the Model 958 is both rugged and reliable, performing especially well in situations with high levels of electrical noise. Available with a choice of either Clamping Flange (Type 20) or Synchro Flange (Type 26) servo mounting, sealing up to IP66, and a variety of connector and cabling options. The Model 958 is easily designed into a variety of applications. With so many options that make the Model 958 ultra-durable, this absolute encoder can handle the toughest environments.

COMMON APPLICATIONS

Machine Tools, Robotics, Telescopes, Antennas, Rotary & X-Y Positioning Tables, Medical Scanners

MODEL 958 ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

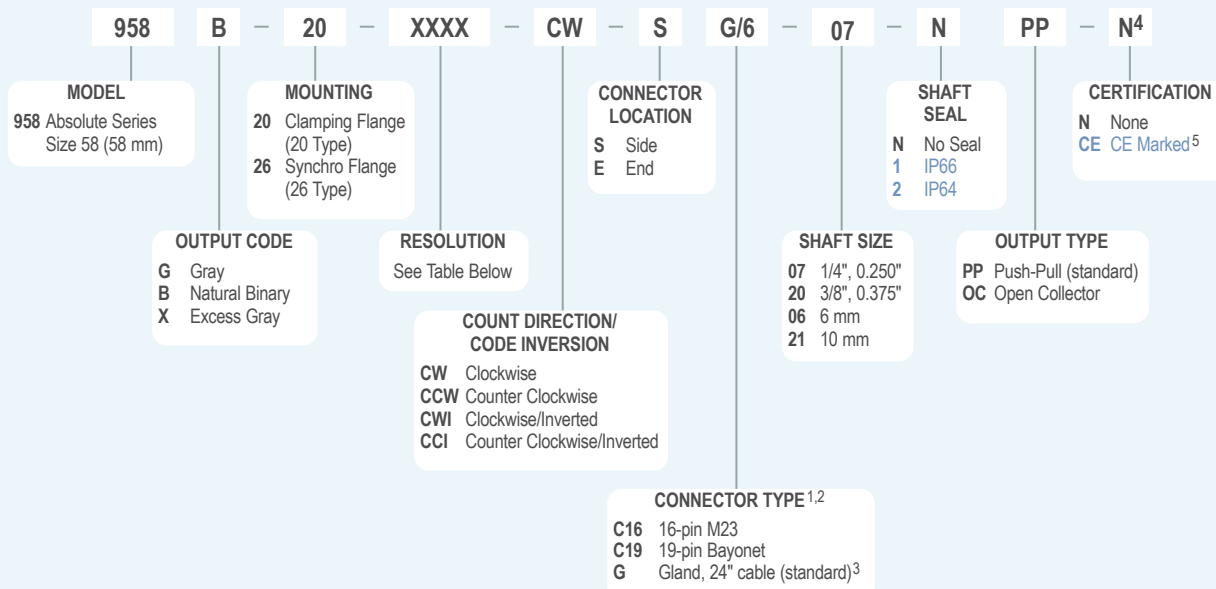

MODEL 958 RESOLUTION TABLE

Output Code	Counts Per Resolution					
Gray Code	0256	0512	1024	2048	4096	
Natural Binary	0250	0256	0360	0500	0512	0720
	1024	1440	2000	2048	2880	4000
					4096	
Excess Gray	0180	0250	0360	0500	0720	1000
	2000	2880	4000			

NOTES:

- For additional connector styles please contact Customer Service.
- For mating connectors, cables, and cordsets see [Accessories](#) at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see [Connector Pin Configuration Diagrams](#) at encoder.com.
- For non-standard cable lengths, add a forward slash (/) plus cable length expressed in feet. Example: G/6 = 6 feet of cable.
- Also available in stainless steel housing. Contact Customer Service for details.
- Please refer to Technical Bulletin [TB100: When to Choose the CE Mark](#) at encoder.com. Contact Customer Service for availability.

MODEL 958 SPECIFICATIONS

Electrical

Input Voltage.....	4.75 to 26 VDC max
Regulation	100 mV peak-to-peak, max ripple at 0 to 100 kHz
Input Current	100 mA max with no external load
Output Format	Absolute – Parallel Outputs
Output Type	Open Collector – 20 mA max per channel Push-Pull – 20 mA max per channel
Code	Gray Code, Natural Binary Code, Excess Gray Code
Max Frequency	50 kHz (LSB)
Rise Time	Less than 1 microsecond
Resolution	Up to 12 bit
Accuracy.....	+1/2 LSB

Control

Directional Control... Field selectable for increasing counts (CW or CCW)


Mechanical

Max Shaft Speed.....	6000 RPM continuous
Radial Shaft Load	27 lb max
Axial Shaft Load	27 lb max
Starting Torque	1.0 oz-in typical for no seal 2.0 oz-in with IP64 shaft seal 3.0 oz-in typical with IP66 shaft seal
Housing	Aluminum
Weight.....	22 oz typical


Environmental

Storage Temp	-20° to 85° C
Humidity.....	98% RH non-condensing
Vibration.....	10 g @ 58 to 500 Hz
Shock.....	20 g @ 11 ms duration
Sealing.....	IP54 (standard), IP64, or IP66 (NEMA 13 and 4) optional

MODEL 958 CLAMPING FLANGE 20 TYPE (20)

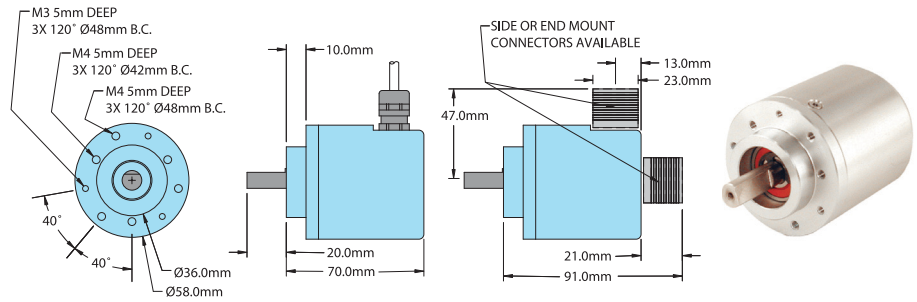

MODEL 958 SYNCHRO FLANGE 26 TYPE (26)

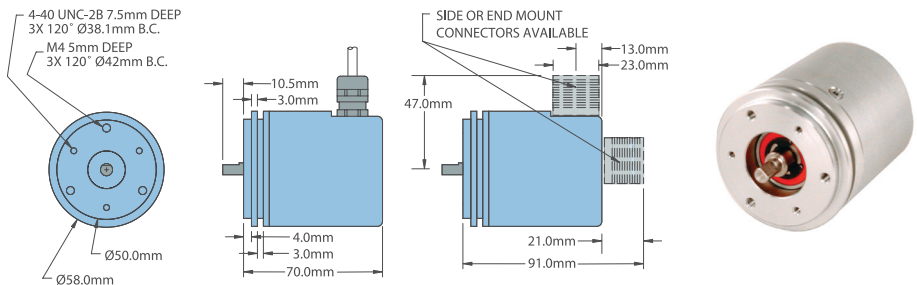

All dimensions are in millimeters with a tolerance of ± 0.17 mm unless otherwise specified.

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

Trim back and insulate unused wires.

Function	Gland Cable† Wire Color	19-pin Bayonet KPT02E14-19P	16-pin M23
S1 MSB	Brown	A	3
S2	White	B	5
S3	Green	C	6
S4	Orange	D	7
S5	Blue	E	8
S6	Violet	F	9
S7	Gray	G	10
S8 LSB 8-bit	Pink	H	11
S9 LSB 9-bit	Red/Green	J	12
S10 LSB 10-bit	Red/Yellow	K	13
S11 LSB 11-bit	Turquoise	L	14
S12 LSB 12-bit	Yellow	M	15
Direction**	Red/Blue	R	4
Case Ground	Drain/Screen	S	16
OV Common	Black	T	1
Special*	White/Red	U	--
+VDC	Red	V	2

*Where fitted.

**Direction control standard is CW increasing when viewed from the shaft end. Direction pin is pulled high to 5V internally. Direction pin must be pulled low (GND, Common) to reverse count direction. Applied voltage to direction pin should not exceed 5V.

†Standard cable is 24 AWG conductors with foil and braid shield.